




BENTUR

AUTOMATIC DOOR SYSTEM

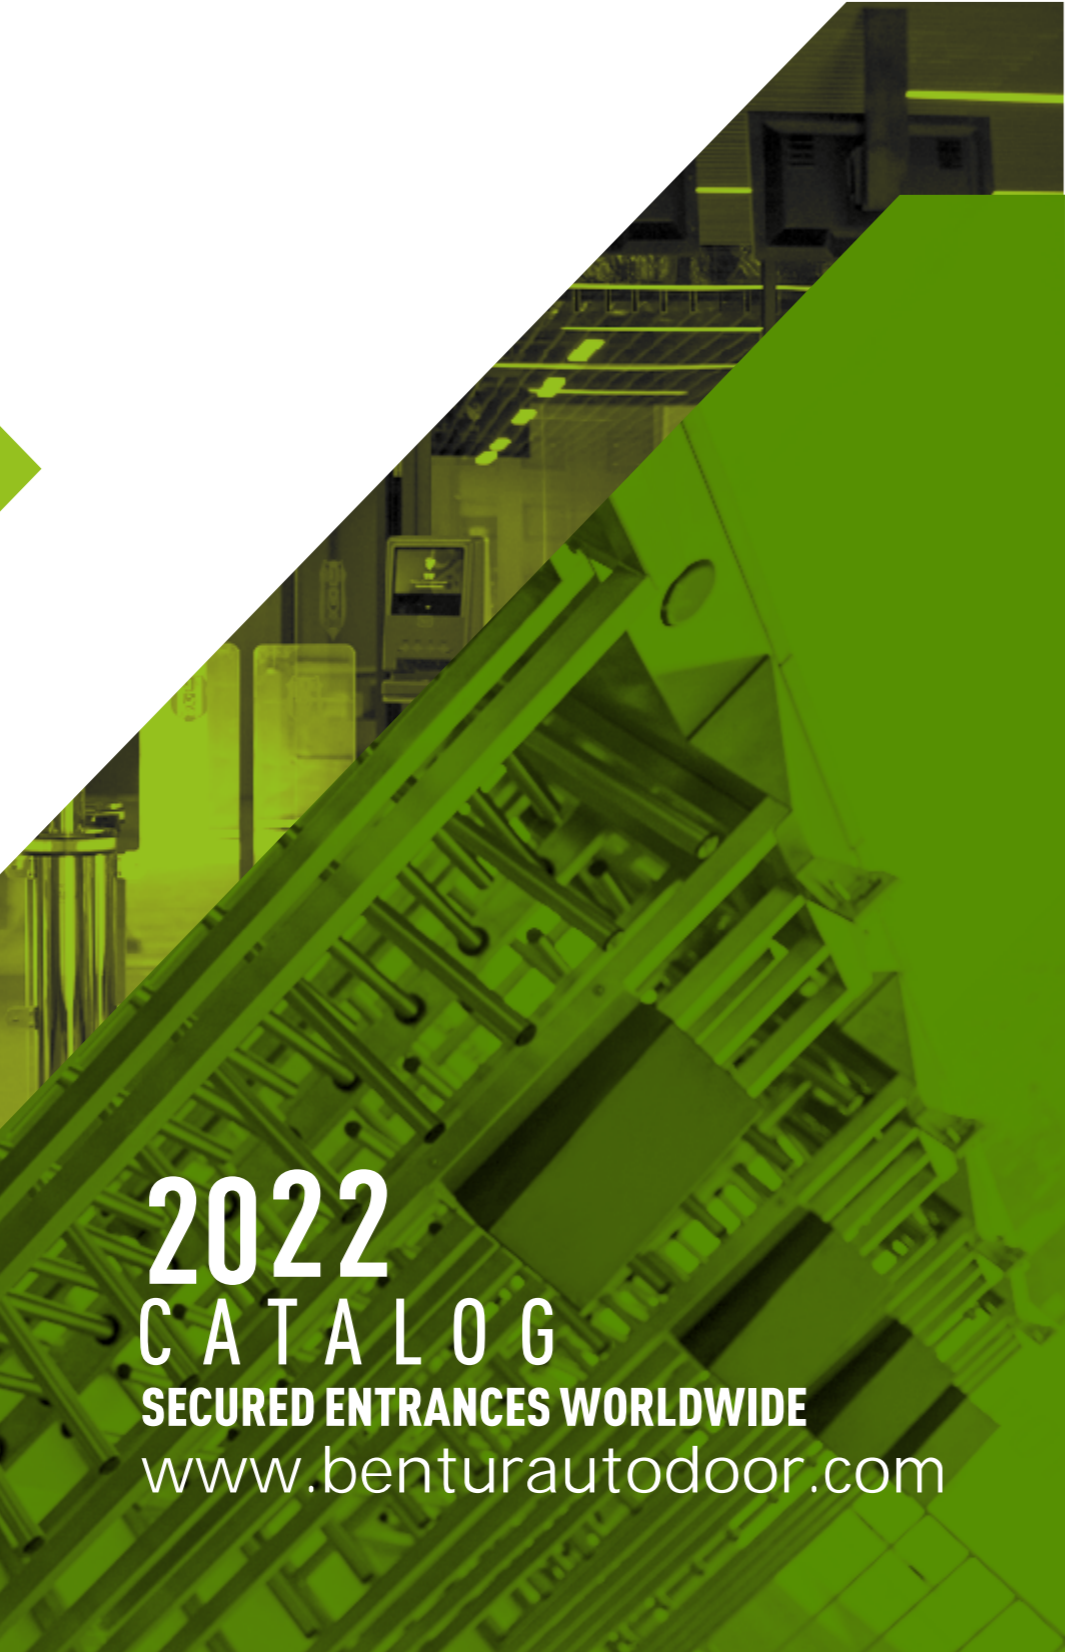

2022
CATALOG
SECURED ENTRANCES WORLDWIDE
www.benturautodoor.com

BENTUR
AUTOMATIC DOOR SYSTEM

Istanbul Office:
Necip Fazıl Mahallesi Güney Sokak No:5 Kat:2 Yukari Dudullu - Istanbul

Phone Call: +90 216 540 16 63
Whatsup : +90 553 170 50 26



SWING SRV SWING GATE TURNSTILE

Operation

Bi-directional motor wing.

Frame

2 pieces, 2 mm thick polished shiny AISI 304 quality stainless steel pipe and stainless steel direction profiles.

Wing

10 mm thick tempered glass. Optional: Plexiglass.

Functions

Adjustable passage information. Passage time. Memory mode. Audio warning. Adjustable passage direction.

Mechanism

Fail-Safe (Free passage during power failure).

Emergency Mode

In case of emergency, the unit switches in to "emergency mode" following the signal received from manual button or fire detection system, and the wing can be opened in either directions automatically.

Operating Voltage

100-230 VAC, 47-60 Hz

Power Consumption

24W during passages, 15W during stand-by

Operating Temperature

0° / +70°

Opening-Closing Speed

~2 sec.

Passage Width

56 cm

Weight

~56 kg

Security Level

Deterrent.

Areas of Use

Suitable for indoor use.

Accessories

Remote controller unit. Button control unit. Photocell with opposite unit. Meter. Stainless steel reading bracket. Stainless steel bottom plate. Logo engraving. Tempered glass side panels. Led wing lighting.

